

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2002-281032

(43)Date of publication of application : 27.09.2002

(51)Int.Cl.

H04L 12/26

G06F 13/00

(21)Application number : 2001-076840

(71)Applicant : TOSHIBA CORP

(22)Date of filing : 16.03.2001


(72)Inventor : SATO TATSUO

(54) SWITCHING PROGRAM FOR OBJECT TO BE MONITORED AND ITS METHOD AND MONITOR SYSTEM

(57)Abstract:

PROBLEM TO BE SOLVED: To improve reliability by continuously performing monitor following the dynamic change of a low order object to be monitored.

SOLUTION: The IP addresses of nodes 11, 12,... to be monitored in order to be added/erased are inputted to a master monitor device 4 in a batch as addition/erasure node list files A and D, and the IP addresses are assigned to slave monitor devices 21, 22,... by the master monitor device 4, and the nodes 11, 12,... are added/erased based on the IP addresses by the respective slave monitor devices 21, 22,....

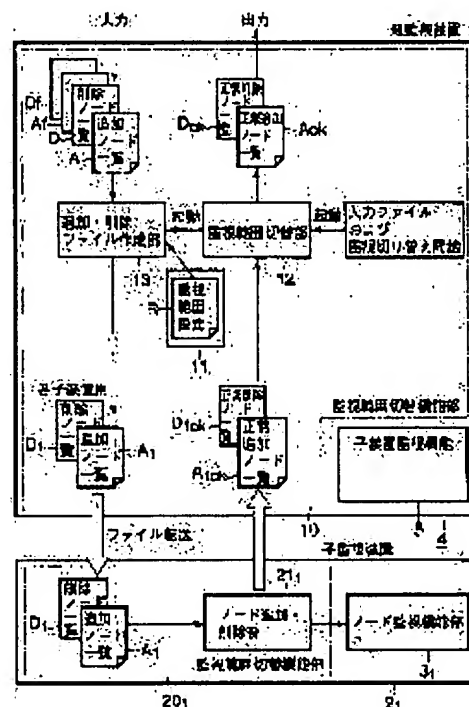

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

BEST AVAILABLE COPY

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's
decision of rejection]

[Date of requesting appeal against examiner's
decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office